

Without antistatic treatment, it provides a more cost-effective solution and is especially suitable for asbestos removal.


Style No.	YT100
Fabric	Multilayer SMS Fabric
Seam Type	4-thread Overlocked Seam 7-9 stitches per inch - Bite depth at 4 mm
(MOQ)	5000 pieces
Color	White, Blue
Packing	50 pcs/carton
Approvals	CE Regulation (EU) 2016/425 UKCA Regulation 2016/425 Module B Certification Module D Certification



Certifications




Applications

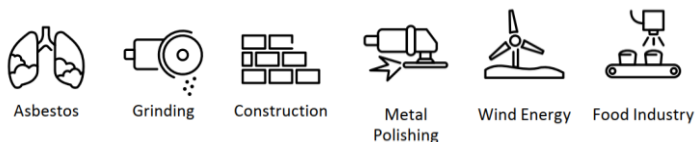

Technical Data

PHYSICAL PROPERTIES	TEST METHOD	CLASS	CHEMICAL PROPERTIES	TEST METHOD	PENETRATION	REPELLENCY	
Abrasion Resistance	EN 530	2	Sulfuric Acid (30%)	EN ISO 6530	3	3	
Flex Cracking Resistance	EN ISO 7854/B	6	Sodium Hydroxide (10%)	EN ISO 6530	3	3	
Trapezoidal Tear Resist.	EN ISO 9073-4	1	WHOLE SUIT TEST PERFORMANCE				CLASS
Tensile Strength	EN ISO 13934-1	1	Type 5	EN ISO 13982-1:2004+A1:2010 Inward Leakage Test Test method: EN ISO 13982-2:2004 pass = $L_{jmn.82/90} \leq 30\%$ and $L_{5.8/10} \leq 15\%$			Pass
Puncture Resistance	EN 863	1	Type 6	EN 13034:2005+A1:2009 Reduced Spray Test Test method: EN ISO 17491-4:2008 Method A			Pass
Seam Strength	EN ISO 13935-2	3	EN 1073-2	Against Radioactive Contamination Test method: EN 1073-2:2002 excluding clause 4.2 puncture resistance			1
pH Value	EN ISO 3071	Pass					
Resistance to Ignition	EN 13274-4	Pass					

Limitations



Storage & Disposal

- Store clean and in original packaging at 15°C to 25°C (58°F to 78°F) with <80% humidity
- Store away from sunlight, high temperatures, and solvents
- Shelf life is 60 months from manufacture if stored as above
- Handle and dispose of contaminated garments carefully according to national regulations